

Balun Transformer(1-350MHz)

Features

- Surface mount
- Impedance ratio: 1:4
- Available on tape and reel
- RoHS compliant and Pb free
- 260°C reflow compatible
- CT on Secondary

Description


SCOPE

•MCBT4-1-022 is a 1:4 Balun transformer in a SMT package.

APPLICATION

- Ideally suited for high volume cellular and wireless applications.

Functional Schematic

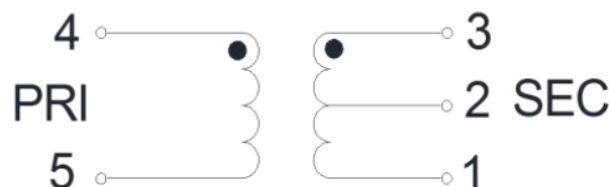


Pin Configuration

Pin #	Function	Pin #	Function
1	Secondary Dot	4	Primary
2	Secondary CT	5	Primary Dot
3	Secondary		

Electrical Specifications@ 25°C

Parameters (P#: ENA PORT)	frequency band	Min.	Typ.	Max.	Unit
Port Impedance, Z ₀ (P1 / P2 / P3)			50/100/100		Ohm
Insertion Loss	5-100MHz		0.7	1.0	dB
	2-300MHz		1.1	2.0	dB
	1-350MHz		1.2	3.0	dB
Amplitude Balance	5-100MHz		0.02	0.1	dB
	1-350MHz		0.12	0.5	dB
Phase Balance (Nominal 180 °)	5-100MHz		0.5	1	Deg
	1-350MHz		2.0	5	Deg

Application & Test Circuit

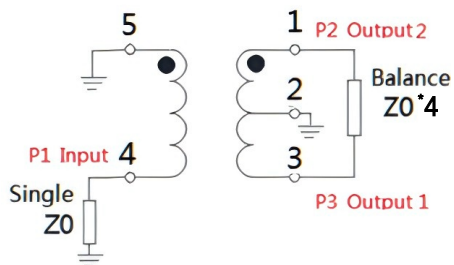Z₀=50Ω


Absolute Maximum Ratings

Parameter	Value
Input Power	250mW MAX
DC Current	30mA MAX
Operating Temperature Range	-40 to 85°C


Balun Transformer(1-350MHz)

Test Curve


Insertion Loss

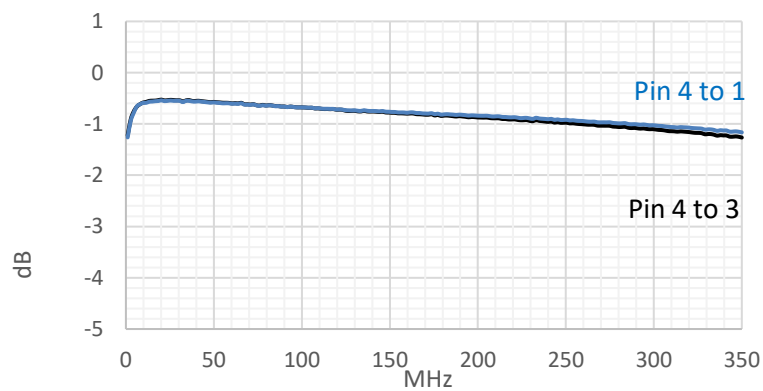


Input Return Loss: Pin 4

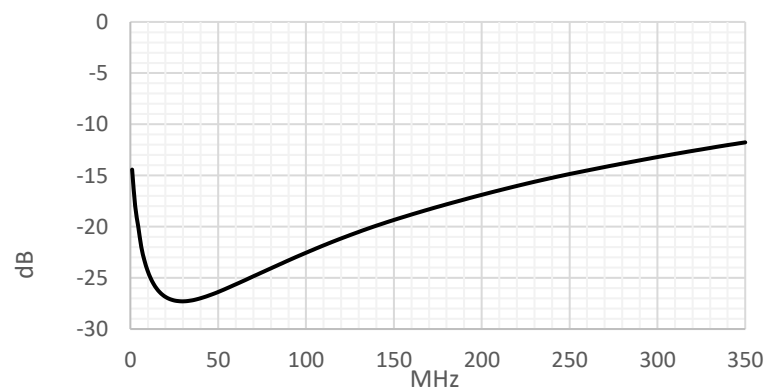

Amplitude Balance

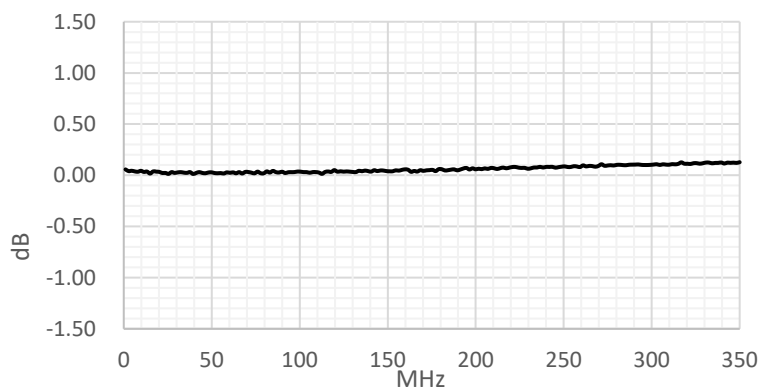


Phase Balance

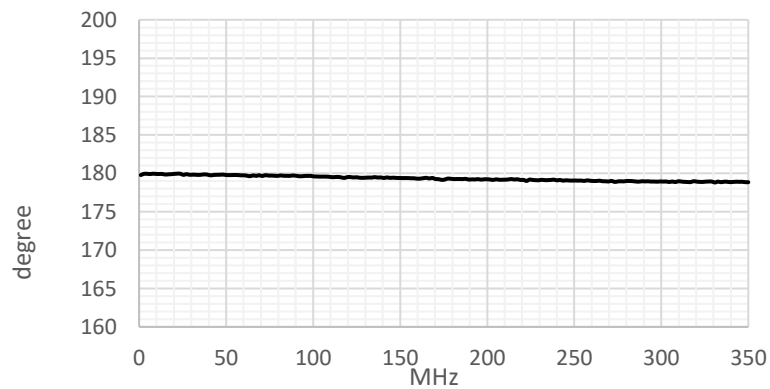


Balun Transformer(1-350MHz)

Dimensions

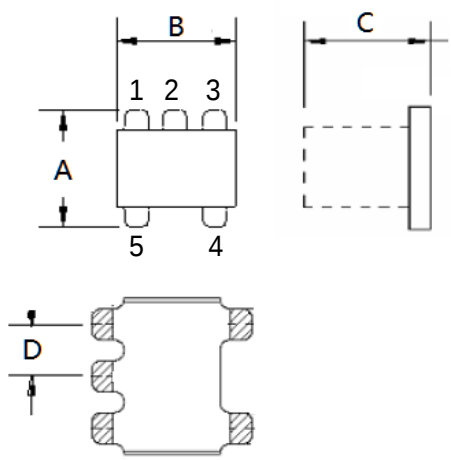

A	B	C
3.81	3.81	2.73
D		
1.27		

Land Pattern

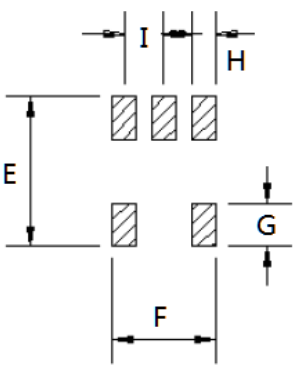



E	F	G
4.83	3.30	1.40
H	J	
0.76	1.27	

Unless otherwise stated dimensions are in mm

Tolerance: .xx ± 0.25, .xxx ± 0.05

Balun Transformer(1-350MHz)

Packing

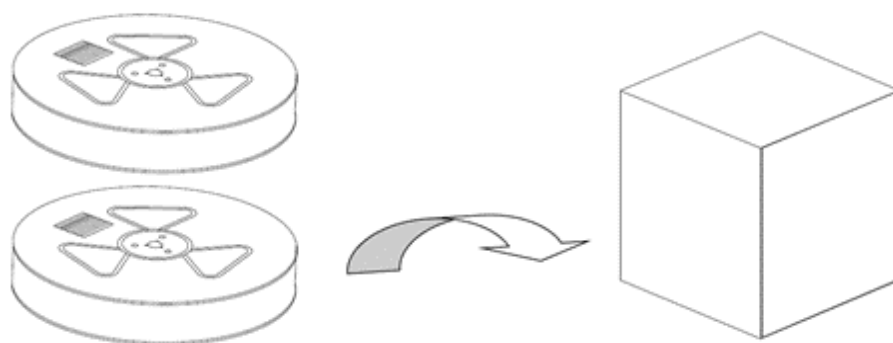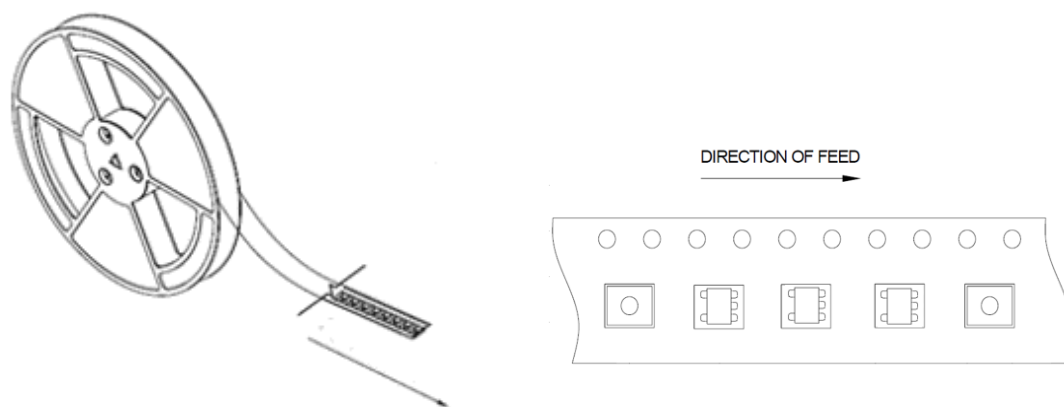

Ten Reel

Export Carton

Quantity per reel: 2000 pcs

Quantity per export carton: 20000 pcs